


Through Stand Cable Assembly

1


SCREW THE BOTTOM PLATE TO
THE WALL / COUNTER
WITH PHILLIPS ROUND HEAD
SCREWS - TYPE 10 X 1½" (PROVIDED).

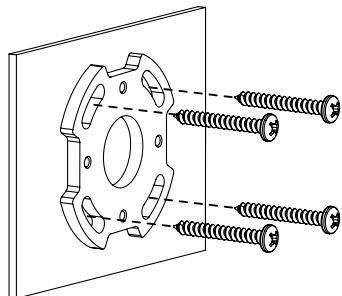

NOTE: IN A WOOD STUD INSTALLATION ENSURE
AT LEAST TWO VERTICALLY ALIGNED
SCREWS ARE SECURED INTO THE STUD.


2

REMOVE FRONT COVER.
USE T-20 TORX
WRENCH (PROVIDED)
TO REMOVE M4 X 10mm
TORX FLAT HEAD SCREWS

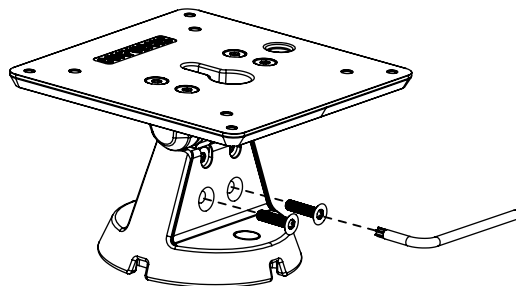


3

ROUTE CHARGING
CABLE THROUGH
MOUNT AS SHOWN

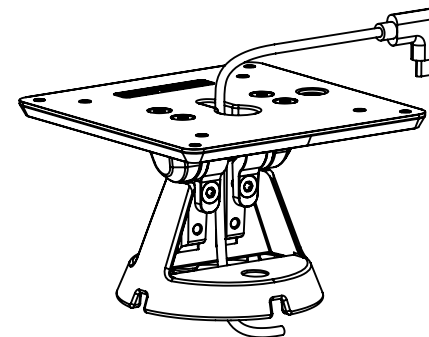


4

ROUTE CHARGING
CABLE THROUGH
MOUNT AS SHOWN

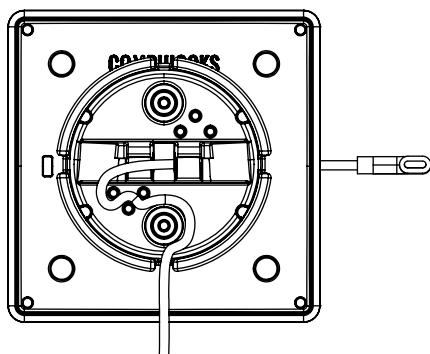


5

PLACE BOW MOUNT OVER BOTTOM PLATE
AND INSTALL USING 2 M4 X 10mm
TORX FLAT HEAD SCREWS AND WRENCH (PROVIDED).
INSTALL RUBBER PLUGS.

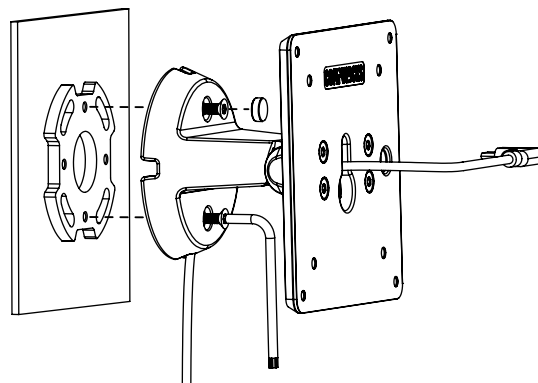


6

ROUTE CHARGING CABLE
THROUGH ENCLOSURE OR VESA MOUNT.
INSTALL TO MOUNT USING M4 X 8mm
PHILLIPS PAN HEAD SCREWS (PROVIDED)

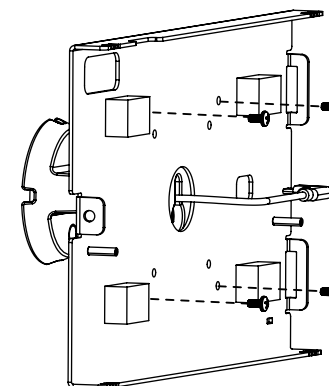


7

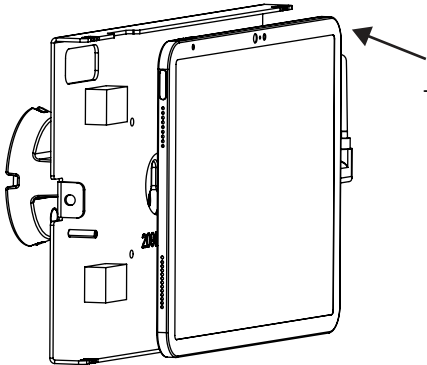



ATTACH CHARGING CABLE
TO TABLET, LEAVE A SMALL LOOP
OF CABLE BENEATH THE TABLET

8

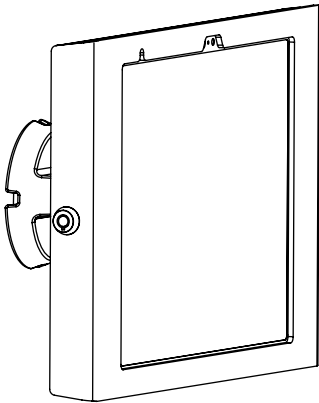

INSTALL THE REST OF THE
ENCLOSURE OR VESA MOUNT
PER THEIR INSTRUCTIONS

Tilt Tension Adjustments

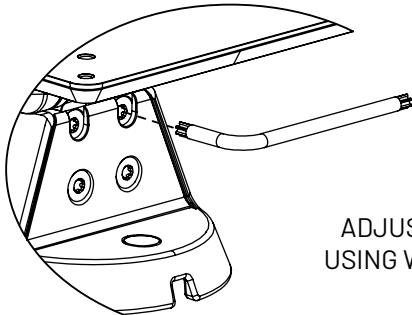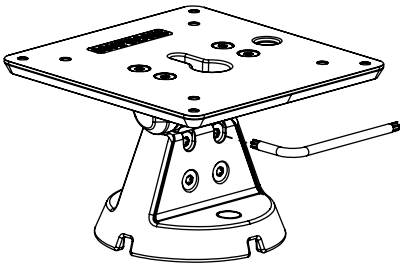


ADJUST HINGE TENSION
USING WRENCH (PROVIDED)

IN THE BOX



Bow Mount



Bottom Plate



Rubber Plugs



10 X 1 1/2" Phillips
Round Head
Screw



M4 X 10mm
Torx Flat Head
Screw




M4 X 8mm
Phillips Pan Head
Screw




T20 TORX L-Wrench

1

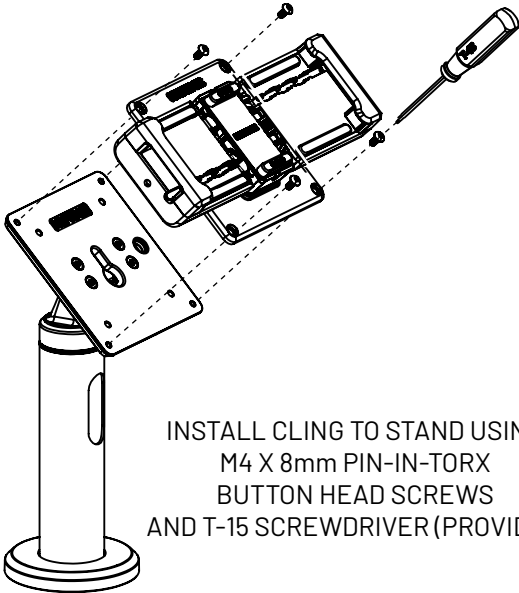

INSTALL CLING TO STAND USING
M4 X 8mm PIN-IN-TORX
BUTTON HEAD SCREWS
AND T-15 SCREWDRIVER (PROVIDED)


2

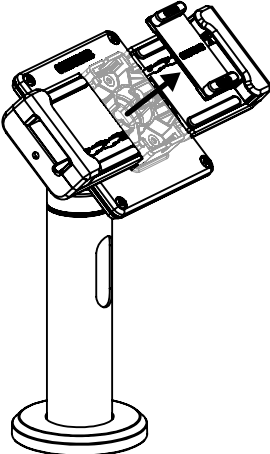

REMOVE PAD FOR CABLE ROUTING


NOTE: IF YOU ARE NOT USING A CABLE,
PROCEED DIRECTLY TO STEP 5

3

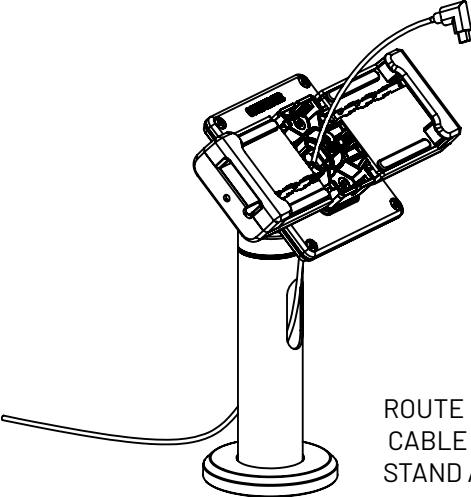

ROUTE CHARGING
CABLE THROUGH
STAND AS SHOWN

4

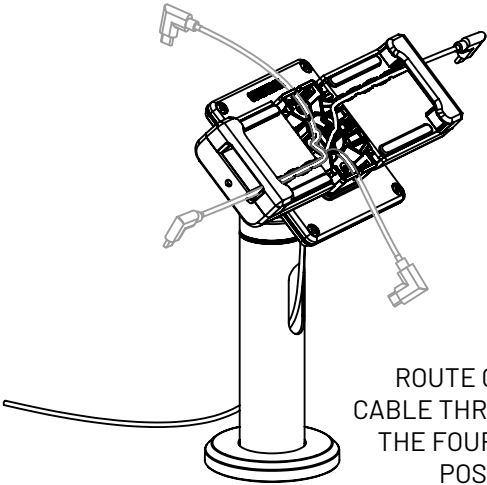

ROUTE CHARGING
CABLE THROUGH ONE OF
THE FOUR OPTIONAL
POSITIONS


5

SELECT THE CORRECT PAD
BASED ON YOUR TABLET THICKNESS.
NOTE: PAD 3 IS PRE-INSTALLED.
REPLACE IT IF YOUR TABLET
REQUIRES A DIFFERENT SIZE

1

2

3

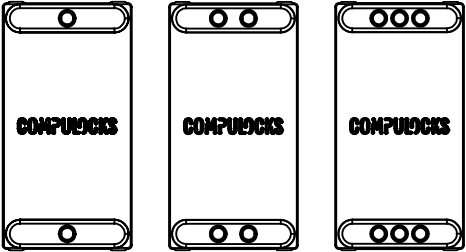


TABLET DEPTH TABLE

PAD 1	8.2mm - 9.3mm
PAD 2	6.5mm - 8.2mm
PAD 3	5.1mm - 6.8mm


6

PLACE YOUR CHOSEN PAD INTO THE
CENTER CONSOLE OF THE CLING BRACKET

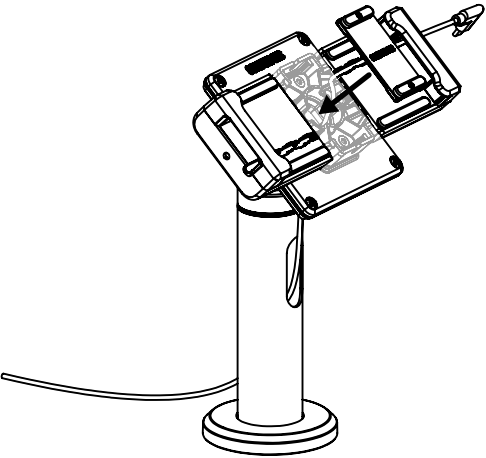


7

PLACE TABLET
AND THEN CONNECT
CHARGING CABLE

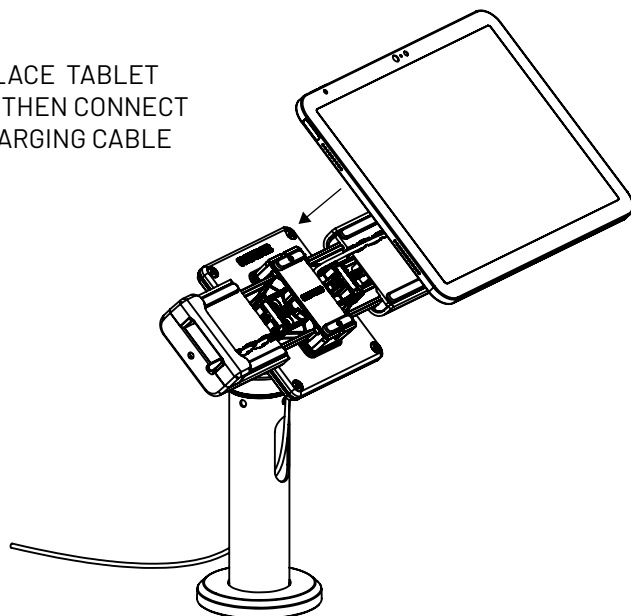





8

USE T-15 SCREWDRIVER (PROVIDED)
TO SECURE TABLET IN PLACE
BY TIGHTENING BOTH CLAMPS.

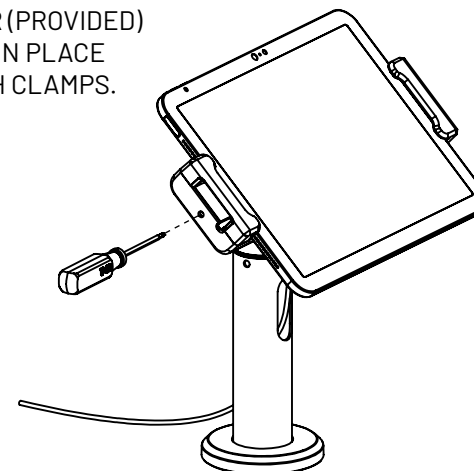


CAUTION
WHEN INSTALLING TABLET,
DO NOT OVER-TIGHTEN THE CLAMPS.
OVER-TIGHTENING COULD LEAD
TO TABLET DAMAGE

Fits VESA 100*100 Mount Stands

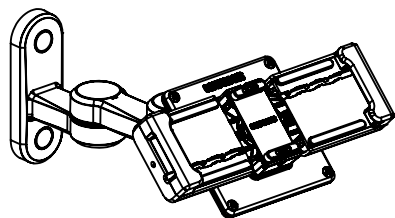


IN THE BOX



T-15 Screwdriver



M4 X 8mm Pin-in-Torx
Button Head Screws



Cling Mount



Pads