



1

TIGHTEN VESA MOUNTING
PLATE AT 90°

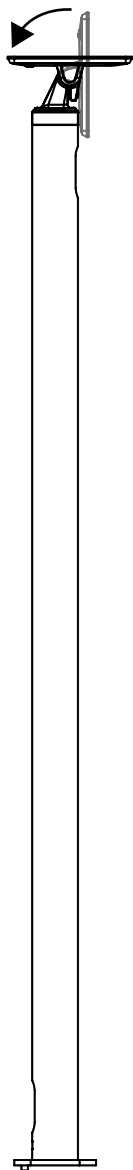


2

TURN STAND ONTO VESA
MOUNTING PLATE AND PLACE ON FLAT SURFACE.
PLACE BOTTOM PLATE
AND ALIGN WITH HOLE USING LOCATOR PIN

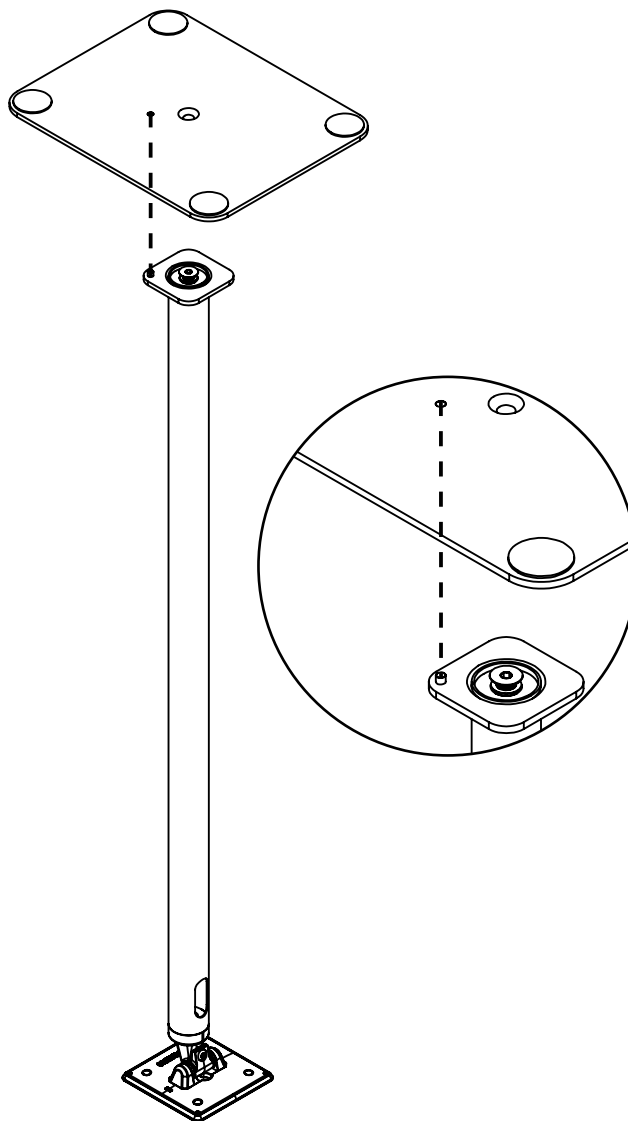


3


INSTALL THE BOTTOM PLATE USING M10 X 25mm
CONICAL ALLEN SCREW (PROVIDED)
AND 6mm ALLEN WRENCH (PROVIDED)

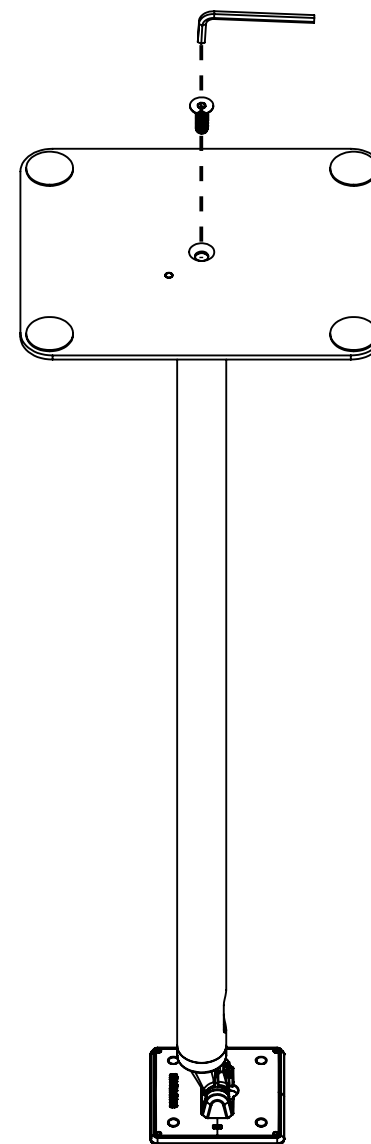


4 Free Standing or Floor Mounting

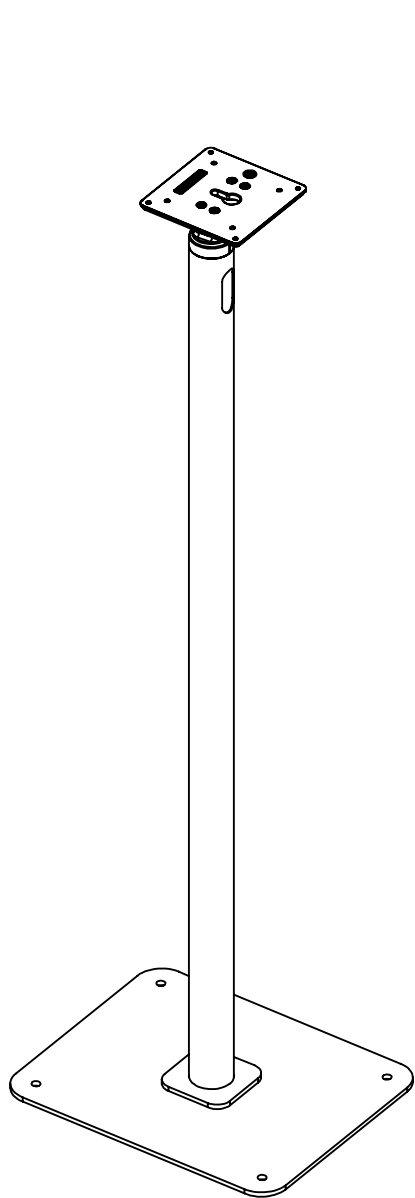

REMOVE RUBBER PLUGS

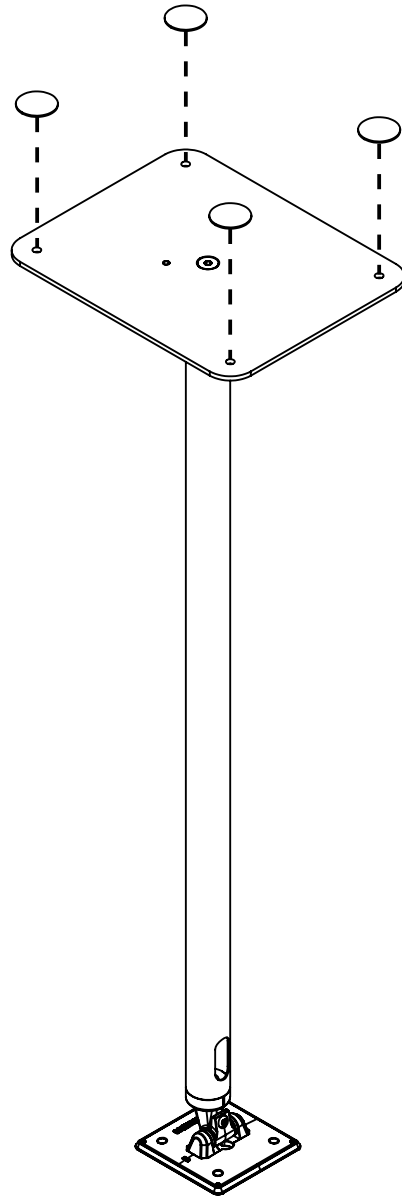


SCREW BOTTOM PLATE TO THE FLOOR
(SCREWS NOT PROVIDED)

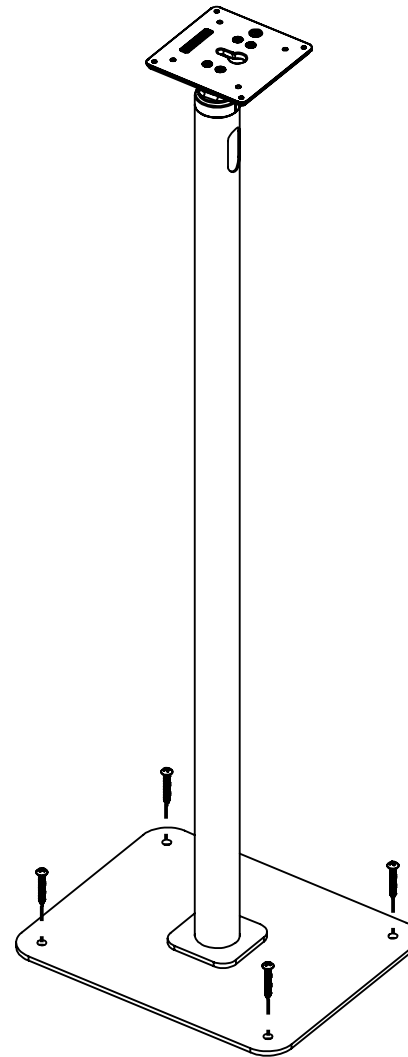

5

ROUTE CHARGING CABLE
THROUGH THE STAND AS SHOWN

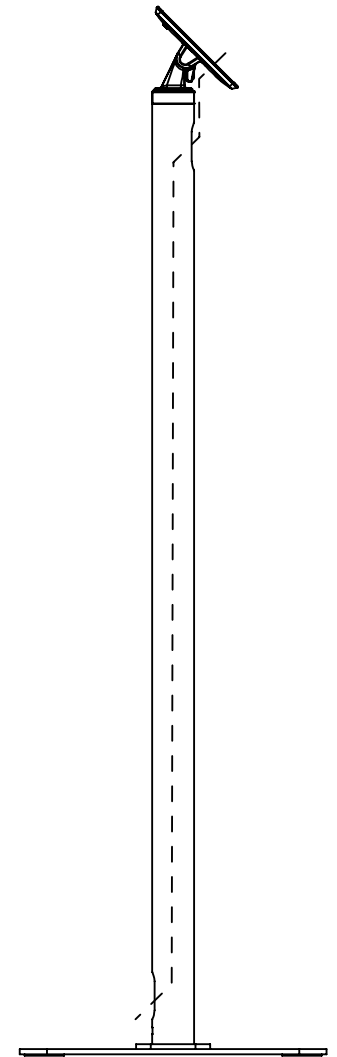

- 6

INSTALL ENCLOSURE/VESA MOUNT
TO STAND USING M4 X 8mm
PHILLIPS PAN HEAD SCREWS (PROVIDED)
- 7

INSTALL THE ENCLOSURE TOP
PLATE/VESA MOUNT PER
THEIR INSTRUCTIONS

Tilt Tension
Adjustments

In The Box

ADJUST HINGE
TENSION USING
T30 TORX
L-WRENCH
(PROVIDED)

- 

M4 X 8mm
Phillips Pan Head
Screws
- 


T30 TORX L-Wrench

- 


M10 X 25mm
Conical Allen
Screw

- 

6mm Allen Wrench


- 

Bottom Plate

- 


Swift Pole

1

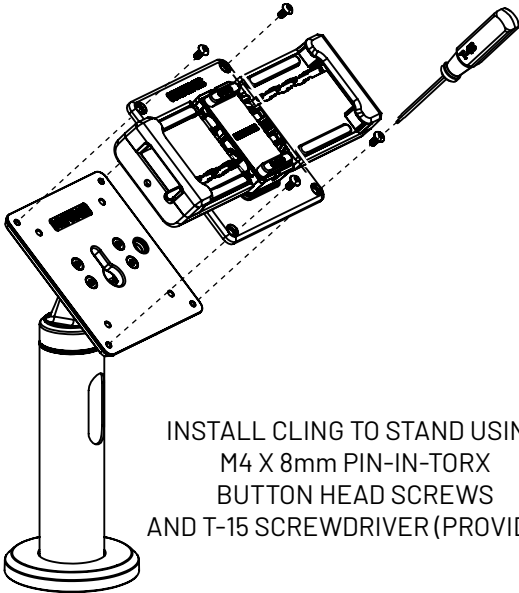

INSTALL CLING TO STAND USING
M4 X 8mm PIN-IN-TORX
BUTTON HEAD SCREWS
AND T-15 SCREWDRIVER (PROVIDED)


2

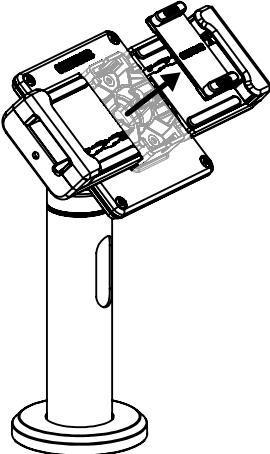

REMOVE PAD FOR CABLE ROUTING


NOTE: IF YOU ARE NOT USING A CABLE,
PROCEED DIRECTLY TO STEP 5

3

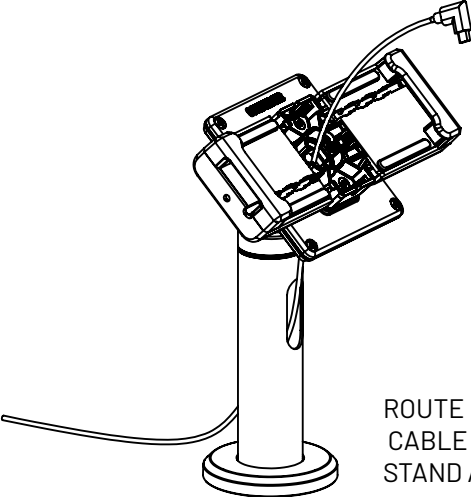

ROUTE CHARGING
CABLE THROUGH
STAND AS SHOWN

4

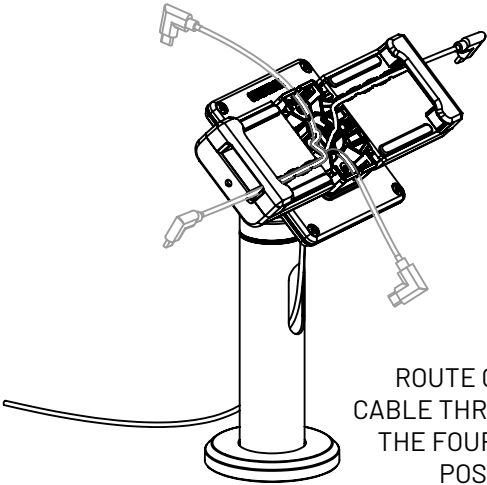

ROUTE CHARGING
CABLE THROUGH ONE OF
THE FOUR OPTIONAL
POSITIONS


5

SELECT THE CORRECT PAD
BASED ON YOUR TABLET THICKNESS.
NOTE: PAD 3 IS PRE-INSTALLED.
REPLACE IT IF YOUR TABLET
REQUIRES A DIFFERENT SIZE

1

2

3

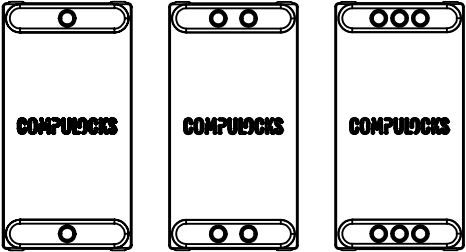


TABLET DEPTH TABLE

PAD 1	8.2mm - 9.3mm
PAD 2	6.5mm - 8.2mm
PAD 3	5.1mm - 6.8mm


6

PLACE YOUR CHOSEN PAD INTO THE
CENTER CONSOLE OF THE CLING BRACKET

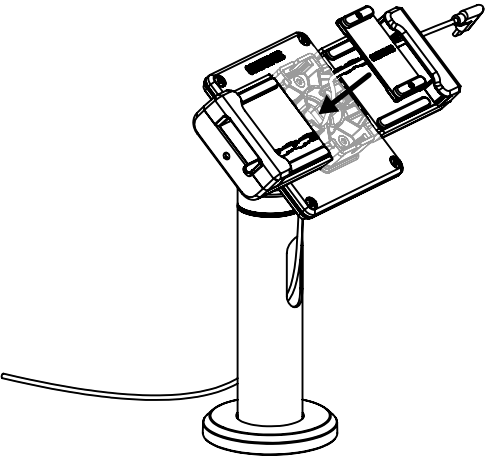


7

PLACE TABLET
AND THEN CONNECT
CHARGING CABLE

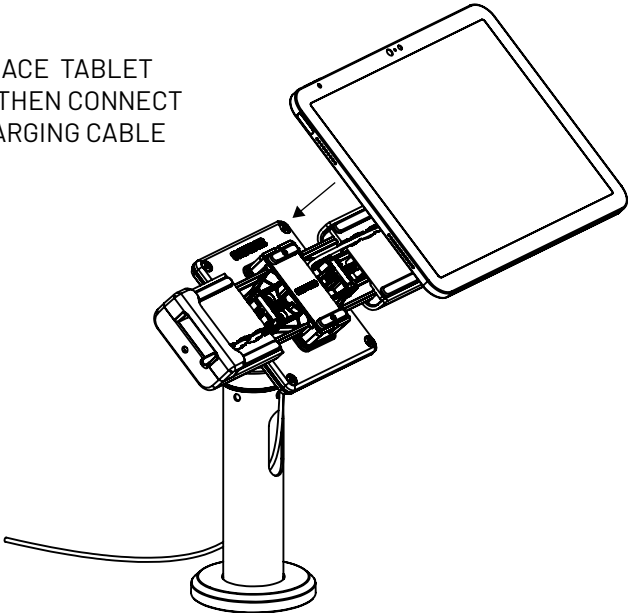





8

USE T-15 SCREWDRIVER (PROVIDED)
TO SECURE TABLET IN PLACE
BY TIGHTENING BOTH CLAMPS.

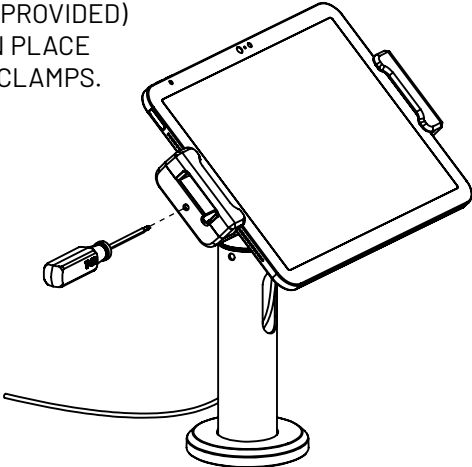


CAUTION
WHEN INSTALLING TABLET,
DO NOT OVER-TIGHTEN THE CLAMPS.
OVER-TIGHTENING COULD LEAD
TO TABLET DAMAGE

Fits VESA 100*100 Mount Stands

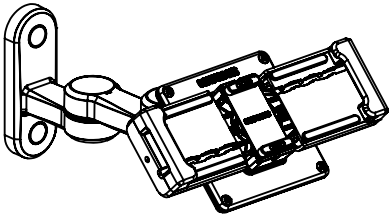


IN THE BOX



T-15 Screwdriver



M4 X 8mm Pin-in-Torx
Button Head Screws



Cling Mount



Pads